


Firmware Update

Step1 Install printer via network or USB.

Step2 Visit System preferences > Printers&Scanners,choose “Munbyn ITPP941AP” and click “Options&Supplies” button.

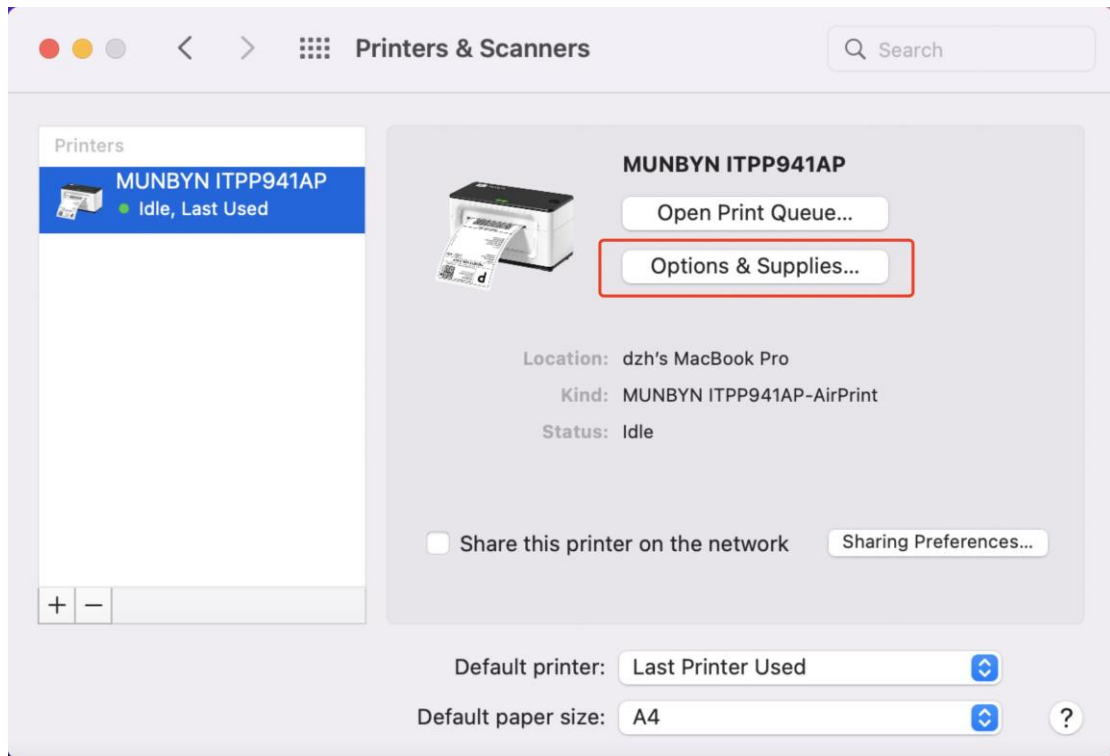

Click “Show Printer Web page” button.

GeneralSupply Levels

Name:

Location:

Device Name: MUNBYN_ITPP941AP

Driver Version: 3.0


Show Printer Web Page...


Find Printer

Cancel

OK

If you're visiting for the first time, you may see a page below, please click "Show Details" button and choose "visit this website"

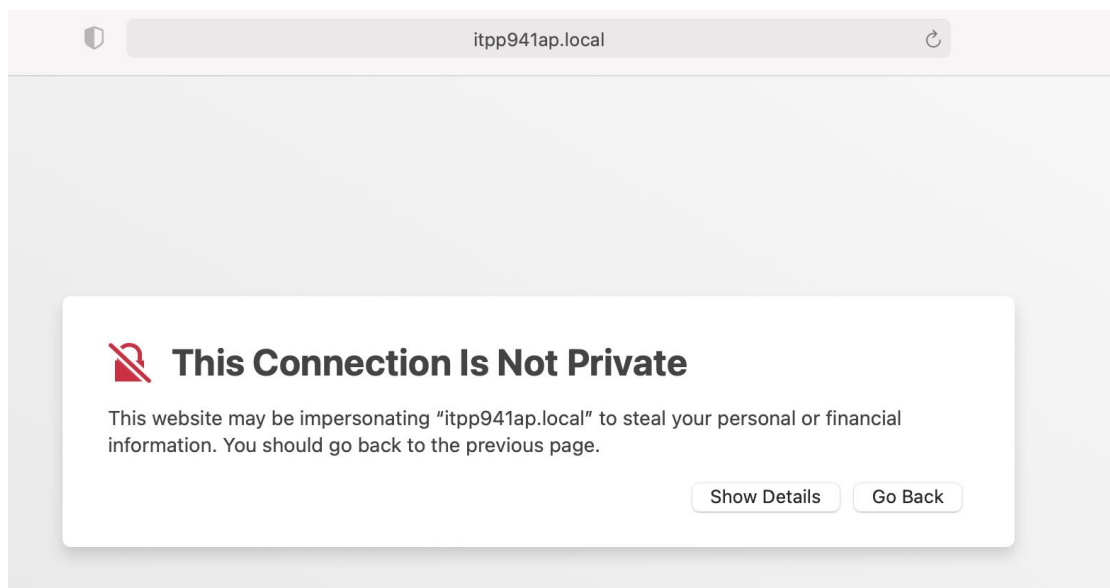

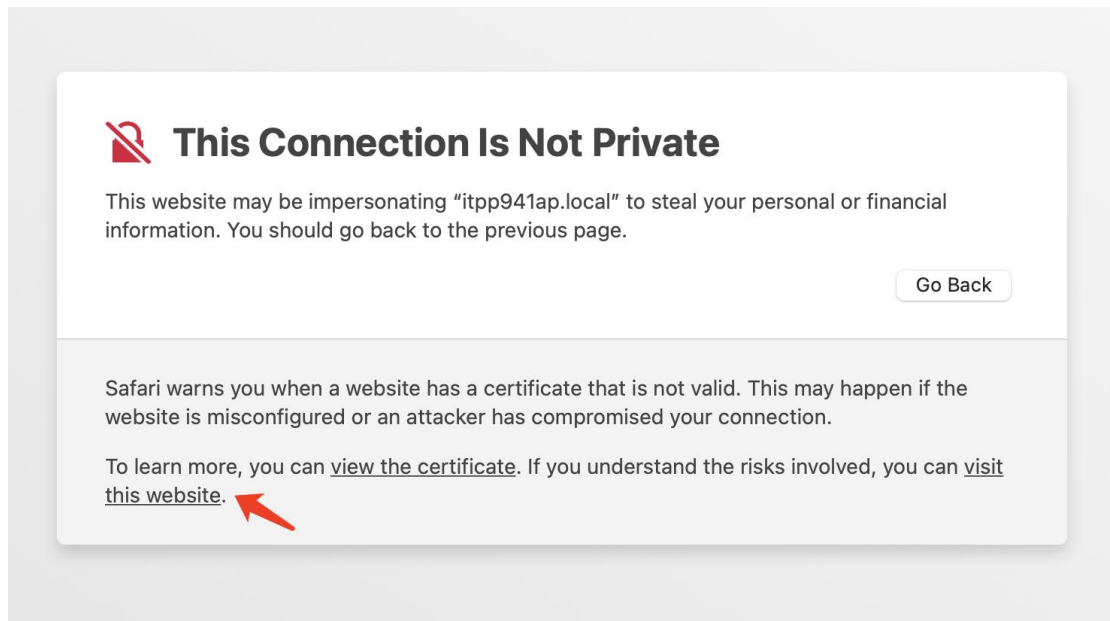

You must create your password when you first log in.

The screen has a yellow background. At the top right is the "MUNBYN" logo in orange text on a white background. Below the logo, the text "Please create your password:" is displayed. Underneath, there is a label "Please enter your new password:" followed by a white password input field. Below the input field is a "Change Password" button.

Enter your password that you created and click "Login" button.

We have set password with 12345678 before shipping sample printer to Apple.

The screen has a yellow background. At the top right is the "MUNBYN" logo in orange text on a white background. Below the logo, the text "Welcome to MUNBYN Printer!" is displayed. Underneath, there is a label "Please enter your password:" followed by a white password input field with a key icon and a dropdown arrow. Below the input field is a "Login" button.

Click "AirPrint Configuration Page"

MUNBYN

ITPP941AP-a565 Configuration

Setup Menu

Idle Activity

ending exceptions.

[AirPrint Configuration Page](#)

[Change Password](#)

[Logout](#)

Click "Firmware Update"

degrees

degrees

meters

Apply Changes

need any supply!


[Certificate Installation](#)

[Certificate Request Generate](#)


[Firmware Update](#)

[Logout](#)

If your firmware version is newest, you will see page below:

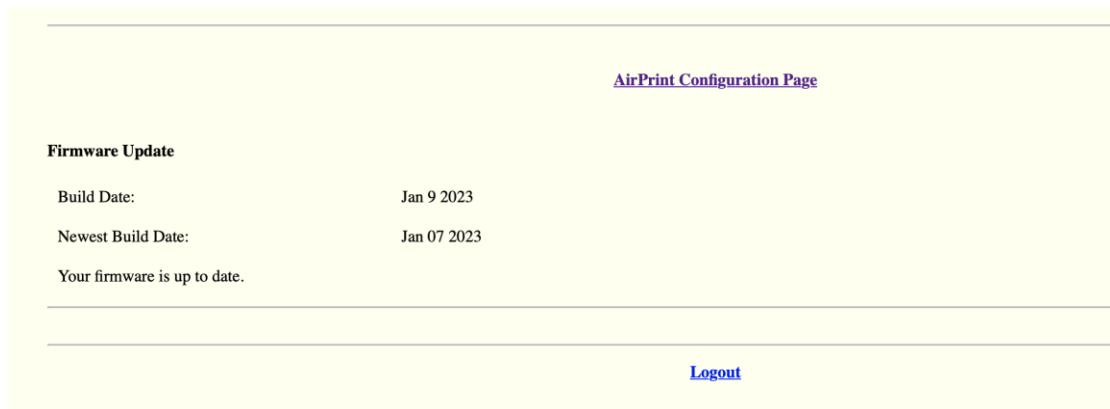

If your firmware version is a old one, you will see page:

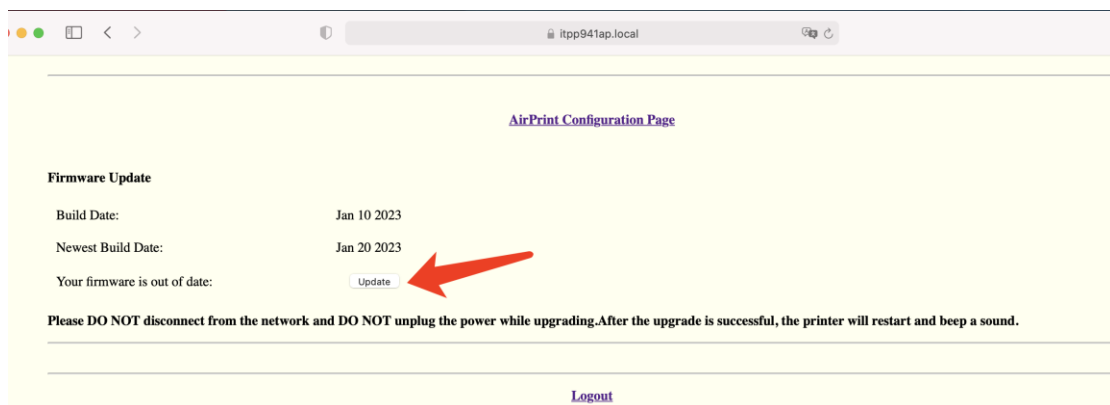

Click "Update" button,printer will get latest firmware from internet and update automatically.

Tips:

1. Please DO NOT disconnect from the network .
2. Please DO NOT unplug the power while upgrading.
3. Please DO NOT power off printer until the upgrade is successful.

After the upgrade is successful, the printer will restart and beep a sound.